
OFF THE WALL AND OUT TO THE ROAD

Two numbers do most of the work

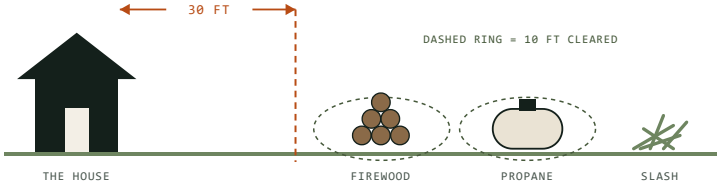

30 ft	**Firewood, propane and slash** — all of it at least that far from the house.
Uphill	Stack **firewood** uphill of the house or level with it, never below — and never between trees or under the deck. Propane: level with the house where you can.
10 ft	Clear flammable vegetation that far around **woodpiles, propane tanks and gas meters**.
Burning?	**Call the sheriff or your fire department first.** Restrictions change constantly.
Driveway	Thin **30 ft back from each side**, house to main road. A house number at the road, noncombustible and reflective — a crew that cannot find you cannot defend you.

WHO PAYS FOR SOME OF IT

$1,000 STATE TAX CREDIT

Colorado pays your contractor's invoice

100% of what a contractor charges you for mitigation on land you own, up to $1,000 — **if your federal taxable income is under that year's limit** ($129,200 for 2025; 2026's is set at year end) and the work meets CSFS standards. Contractor invoices only; not your own labour, rented kit, or anything a grant covered. It cannot exceed your Colorado tax bill, and the excess is lost. **From 2027: $2,000, refundable, limit $300,000 AGI.** Claim on the DR 0104CR with receipts.

10 / 30 DAYS TO APPEAL A RISK SCORE

Your insurer must show you its wildfire score

Since 1 July 2026, an insurer using a wildfire score to price or decline a Colorado policy must tell you the score, the range it sits in, what drove it, and what each mitigation action would do to it. Done work since renewal? Ask for a re-score — 30 days. Disagree? Appeal: acknowledged in 10 calendar days, decided in 30.

Not tax or insurance advice. Your accountant, and your own policy, are the authority.

LINKTR.EE/SIXFOLDCOLORADO

Sixfold

Felling, stump grinding, slash piling, chipping and haul-off — in El Paso, Douglas and Teller counties and the Front Range foothills.

(303) 915-1045

SixfoldColorado.com · Contact@SixfoldColorado.com

Sixfold, LLC · Monument, CO


Sixfold

LAND & FIRE · COLORADO'S FRONT RANGE

COLORADO WILDFIRE · A HOMEOWNER'S GUIDE

Embers start most of the homes that burn

Wind carries burning debris **more than a mile ahead of a fire**. It lands in your gutter, under your deck, in the mulch against your wall. That is the part you can do something about.

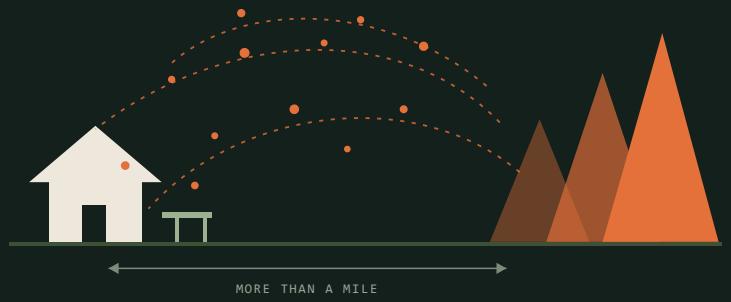

Embers

Land on anything that will take a spark. The usual cause.

Flame

Reaches the wall when fuel sits within five feet of it.

Heat


Lights a wall with nothing touching it at all.

Adapted from the Colorado State Forest Service *Home Ignition Zone* guide (2021) and checklists. CSFS does not endorse Sixfold or any contractor.

START HERE, BEFORE ANYTHING OUTDOORS

Seven places a house catches


Work outward from the wall, not inward from the property line. Every number on the drawing is a job you can do in a weekend.

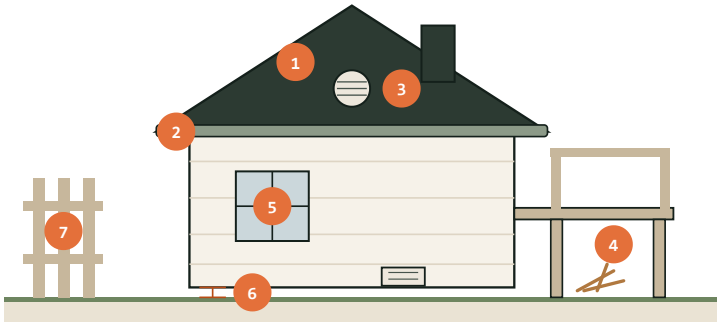

1. **Class A roof.** No wood or shake shingle.
2. **Clear gutters, roof and deck** of needles more than once a year.
3. **1/8-inch metal mesh** on every vent. Standard rodent screen is 1/4 and lets embers through.
4. **Screen under decks** and stilt foundations. Store nothing there.
5. **Tempered glass**, two panes or more. Windows fail before the building does.
6. **Six inches** of clearance between the ground and the bottom of the siding.
7. **Non-combustible fence** within five feet. A fence on the house is part of the house.

+ Fibre cement, brick and stucco beat wood siding under radiant heat.

WHY THE MESH SIZE IS THE WHOLE POINT




Firefighters may not be there. They engage only when it is safe for them to. Prepare the house to stand on its own.

THEN WORK OUTWARD

Three zones, measured from the wall

Build them around **every** structure — house, garage, shed, barn.

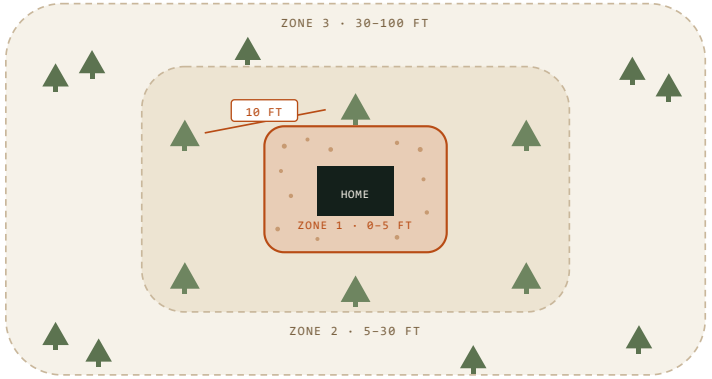

Zone 1 — 0–5 FT · STRIP IT

Rock, gravel or bare earth. **No** shrubs, mulch, firewood or deck storage. Rake needles within 5 ft of every deck and structure. Clear 10 ft around the chimney.


Zone 2 — 5–30 FT · THIN IT

Grass to **4 inches**. **10 ft between crowns** — or leave small groups of two or three, 30 ft apart. Prune up **6–10 ft**, or a third of the tree — whichever is less. Pull ladder fuels and ground juniper. Shrub clumps **2½× their mature height** apart.

Zone 3 — 30–100 FT · OPEN IT

6–10 ft of crown spacing, with real gaps between clumps so fire has to drop to the ground. Take the woody debris away rather than scattering it.

ZONE 2, FROM THE SIDE



These figures are for ponderosa, Douglas-fir and mixed conifer below 9,500 ft. Piñon-juniper, lodgepole, spruce-fir, Gambel oak and aspen all differ — aspen should generally not be thinned at all. On slopes, increase every spacing.